

OPEL ESL

S.O.S Car Simulator instruction manual

ESL/ELV REPLACEMENT PROGRAM

Page 2

- Program introduction

MIN. VERSION

PHOTO

PINOUT

VIDEO

Page 3

- **OPEL**

001





● Program introduction



Example cars

ESL


39028845
23203935
23484342
23377962
23103652

ESL

Opel Saab
Vauxhall
Chevrolet

●●● Jumpers to solder

Choose the S.O.S program by soldering the following jumpers depending on your car brand:

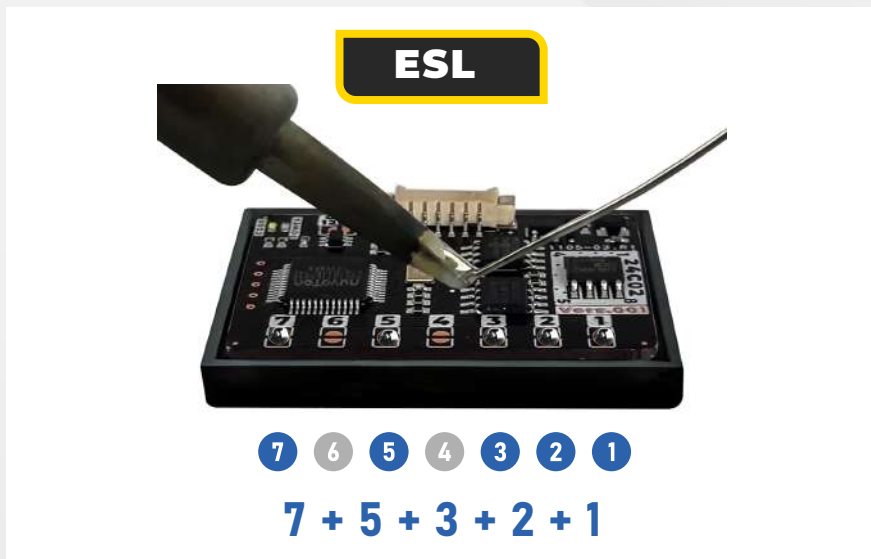

To choose the program you have to solder specific jumpers on the back of the Emulator:

Attention!

Always pul the Emulator back into the plastic cover before attaching it to the ECU board.

Attaching the Emulator to the ECU board without the plastic cover may result! in damaging the ECU or the Emulator!

ESL

● OPEL SAAB VAUXHALL CHEVROLET



Program Usage

The Emulator can be used with OPEL vehicles equipped with a 4-pin SCL plug



Example cars


OPEL

- Opel Saab
- Vauxhall
- Chevrolet
- 39028845
- 23203935
- 23484342
- 23377962
- 23103652



●●● Jumpers to solder

1 Select the S.O.S program by soldering the jumpers on the right:
7 + 5 + 3 + 2 + 1

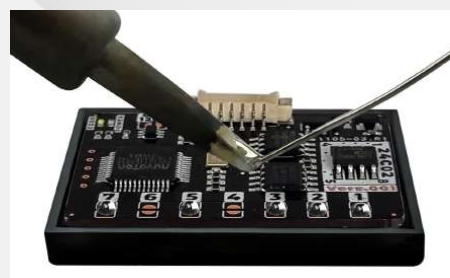

7 6 5 4 3 2 1
7 + 5 + 3 + 2 + 1

2 Connect the Emulator to the SCL plug according to the pictures on the right.

CAN-L	Pin 7
STATU	Pin 5
CAN-H	Pin 4
GND	Pin 2
POWER +12V	Pin 1

3 The original ESL needs to be removed from the car.

